


Scope of work for replacement of fencing work in the pool at CGR

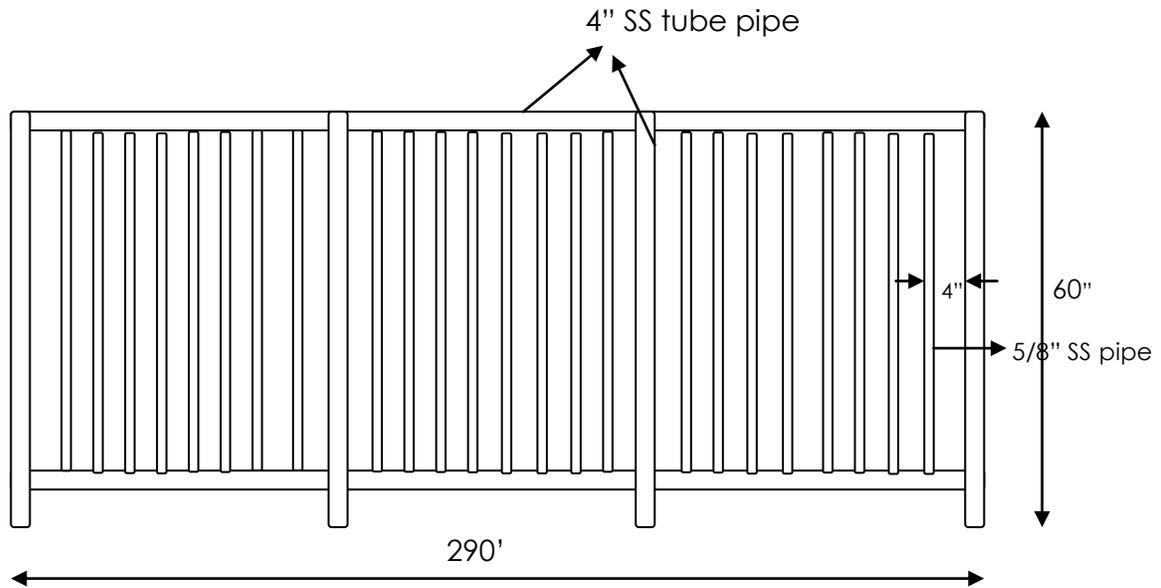

1. Supply and install new SS fencing as per attached drawings. The main Balusters shall be grouted to the floor. Flange has to be provided at the floor Joint area. Total length: 290' (L) x 60"(H).
2. Replace the two gates to the swimming pool with SS grill door. The sizes are: 53.5" (H) x 38" (W) and 59" (H) x 48.5" (W). The outer pipe shall be 1-1/2" pipe and intermediate rods are 5/8" pipe. The supplied spring loaded hinges and safety latches have to be fitted to the gate.

NOTE: ALL SS materials to be used for the above work shall be 304 grade.