



Product Data

3350 DONIPHAN - EL PASO, TEXAS
PH- (915) 584-9491 FAX (915) 581-9120

116069 TRAZZA-CRYL W/B FLOOR SEALER AND FINISH

PRODUCT PROFILE

First line, highest quality, non-yellowing 100 % acrylic floor sealer and finish. Trazza-Cryl is formulated with surface active agents for deep penetration into cementitious surfaces. It will seal, harden, and dustproof the surface offering resistance to abrasion and wear.

RECOMMENDED USES

Properly prepared surfaces of natural stone, limestone, saltillo tile, terracotta clay tiles, brick, mission stone, masonry and concrete surface.

LIMITATIONS:

Not for use on impervious surfaces such as ceramic tile, glass, metal or previously painted surfaces.

MIXING INSTRUCTIONS

Mix thoroughly before application using low speed agitation.

METHOD OF APPLICATION

Airless spray, roller, or brush. Apply at 200 - 300 square feet per gallon depending on surface porosity. Apply Trazza-Cryl in a uniform and even application using a cross hatch pattern. Multi thin coats (2 -3) provide the best protection and appearance, if applied too thick the appearance will appear milky.

SURFACE PREPARATION

Remove all loose mortar, cement spatter, dust, non-paintable form release and curing agents and other forms of contaminants. Surfaces must be properly cured and as free of moisture as possible. Repair cracks, shattered cement and other surface defects.

REDUCTION & CLEAN UP

Do not thin. May be cleaned with soap and clean water.

TECHNICAL DATA

VEHICLE TYPE

100% Acrylic

THEORETICAL COVERAGE

200 -300 square feet per gallon. Actual coverage may differ depending on surface irregularities, ambient conditions and applicator experience.

RECOMMENDED COATS

2 - 3 depending on surface type and desired results

Rexcel

Product Data

3350 DONIPHAN - EL PASO, TEXAS
PH- (915) 584-9491 FAX (915) 581-9120

116069 TRAZZA-CRYL W/B FLOOR SEALER AND FINISH

VOLUME SOLIDS	29%
WEIGHT PER GALLON	8.55 pounds per gallon
VISCOSITY	15 - 20 seconds, Zahn # 2 Cup
DRYING TIME (77°F/50% RH)	Touch: 15 - 20 minutes Recoat: 2 hours
VOC CONTENT	0.80 pounds per gallon
COLOR	Water clear
FINISH number of coats applied.	Satin to Semi-Gloss depending on porosity and
ENVIRONMENTAL STATEMENT	This product is formulated and manufactured without any lead or heavy metal containing ingredients.



BASIC USES & ADVANTAGES

StreetBond150 is combined with **StreetBond Colorants** to offer a wide range of colors and can also be combined with **StreetBond Solar Reflective (SR) Colorants** to produce a cool pavement surfaces for compliance with LEED specifications for urban heat island mitigation and to provide more comfortable environments. **StreetBond150** is also used in the Premium System.

StreetBond150 is worker safe, environmentally safe, meets EPA requirements for Volatile Organic Compounds (VOC) and creates no unpleasant odors during or after installation. **StreetBond150** is fully recyclable with the asphalt. **StreetBond150's** friction properties are suitable for both pedestrian and vehicular applications.

Uses:

- Asphalt parking lots, crosswalks, driveways, bus and cycle lanes, pathways, level and raised medians, entryways
- Asphalt preservation
- Can be used on concrete with surface primer

PRODUCT DESCRIPTION

StreetBond150 is an advanced waterborne epoxy-modified acrylic coating specifically designed for application on textured (stamped) or non-textured (flat) asphalt pavements. One of **StreetBond150's** most important characteristics is that, unlike normal waterborne coatings, **StreetBond150's** unique design allows it to maintain durability even when wet. **StreetBond150's** flexibility, adhesion and elongation allow for the expansion and contraction that is a characteristic of asphalt (flexible) pavements without cracking. **StreetBond150** extends asphalt life by providing protection from the harmful effects of oxidation due to UV exposure and weathering.

PACKAGING & SHELF LIFE

One unit of **StreetBond150** consists of:
 (1) - 5 gallon (19 liter) bucket of Part A
 (1) - 1 quart (0.95 liter) container of Part B
 (1) - chosen **StreetBond** Colorant (sold separately)

Shelf life 24 months if unopened containers stored between 40°F and 90°F (4°C and 32°C).

PRODUCT CHARACTERISTICS

STREETBOND150	
Density	13.7 lb/gal, 1.65 g/mL [ASTM D1475]
Volume Solids	59.14% (±2) [ASTM D2697]
Weight Solids	71.6% (±2) [ASTM D1644]
VOC (calculated)	<19 g/L
Taber Abrasion (Dry - H-10 wheel)	0.33 g/1000 cycles [ASTM D4060]
Taber Abrasion (Wet - H-10 wheel)	0.14 g/1000 cycles [ASTM D4060]
Mandrel Bend	1/8" @ 23°C [ASTM D522]
Water Absorption	7.98% [ASTM D570]
Permeance	5.6 perms [ASTM D1653]
Adhesion	692 psi [ASTM D4541]

Drying Time (Touch Dry)	1-4 hours at 77°F (25°C) and 40% humidity [ASTM D5895]
Friction	Dry = 81.3 Wet = 77.3 [ASTM E303]
Hardness	80.8 [ASTM D2240]
Freeze Point	32°F (0°C)
Application Temperature	+50°F to 105°F (Ambient) (10°C to 40°C)
Standard StreetBond Colorant Colors (Solar Reflective, Premium Colorants, & Custom Colors available)	Bedrock, Black, Brick, Burnt Sienna, Chestnut Brown, Concrete Grey, Fawn, Granite, Hunter Green, Irish Cream, Khaki, Marigold, Merlot, Patriot Blue, Pewter, Royal/Safety Blue, Sandstone, Sierra, Slate, Sun Baked Clay, Sunset Blush, Terracotta, White

APPLICATION INSTRUCTIONS

Mixing: Each mixed unit of **StreetBond** coating consists of a Part A pail to which a Part B, your chosen colorant and 1 quart (0.95L) of water (empty part B can). Mix pail for 3 minutes. In warmer conditions add a total of 1.5 quarts (1.4L) of water to improve workability before mixing. In cooler conditions add only a total of ½ quart (0.47L) of water to improve dry time before mixing.

Surface Preparation: Dirt, debris, water and contaminants sitting on the surface will affect adhesion. Thoroughly clean surface using a broom and backpack blower or, in severe situations, use a power washer. Areas containing chemical contaminants such as vehicle fluids need to be treated using a degreasing solution. Proper removal of contaminants and degreasing solution is necessary prior to coating application. Care should be taken to ensure that the substrate is dry before applying the coating.

Consult the **StreetBond** Substrate Guide if you are unsure of the quality of the surface. An environmentally friendly cleaner should be used. Adhesion promoter may be used for polished asphalt. Some concrete applications will require a primer. No precipitation should be expected within 24 hours.

Recommended Application: **StreetBond150** may be applied in thin coats coat by brush, roller or textured. Typical pedestrian applications require 3 layers of coating. Vehicle applications require 4 layers or more depending on the amount of traffic. Consult the most up to date specification on www.quest-cp.com for more details.

APPLICATION INSTRUCTIONS, CONT'D

Recommended Application Coverage Rates:

# OF LAYERS	COVERAGE (approx)		THICKNESS (approx)			
	ft ² /unit*	m ² /unit*	WET		DRY	
			mm	mil	mm	mil
3	200	18.6	0.84	33	0.48	19
4	150	13.9	1.12	44	0.66	26
5	120	11.2	1.40	55	0.81	32
6	100	9.3	1.68	66	0.97	38

*1 unit is a nominal 5 gallon pail comprising Part A, Part B and Colorant (approximately 4.12 gallons). 1 unit when sprayed as a single layer covers approximately 600sqft (55.7 sqm), with an approximate thickness of 6.3mil (0.16mm) dry.

StreetBond Sealer Concentrate can be applied to the surface of **StreetBond150** once the last layer of coating is dry to the touch. Coating must be allowed to cure before introducing traffic. Cure time vary based on climate conditions and range between 6-24 hours.

LIMITATIONS & PRECAUTIONS

Ambient and surface temperatures must be 50°F (10°C) and rising before coating application. Do not ship or store unless protection from freezing is available. Use **StreetBond**

concrete primers when applying to concrete substrates. No precipitation should be expected within 24 hours.

CLEAN UP

Thoroughly rinse application equipment with clean water before it dries.

SAFETY & HANDLING

For specific information regarding safe handling of this material please refer to the Material Safety Data Sheet (MSDS).

Quest Construction Products

1465 Pipefitter Street
N Charleston, SC 29405
855-817-3082
www.quest-cp.com

Our products are guaranteed to meet established quality control standards, information contained in our technical data is based on laboratory and field testing, but is subject to change without prior notice. No guarantee of accuracy are given or implied, nor does Quest Construction Products assume any responsibility for coverage, performance on injuries resulting from storage, handling or use of our products. Liability, if any, is limited to product replacement or, if applicable, to the terms stated within the executed project warranty.



Color Guide




Coatings for Asphalt Surfaces &
Color Treatment Component for Printed Asphalt Surfaces

StreetBond Colors



Standard Colors

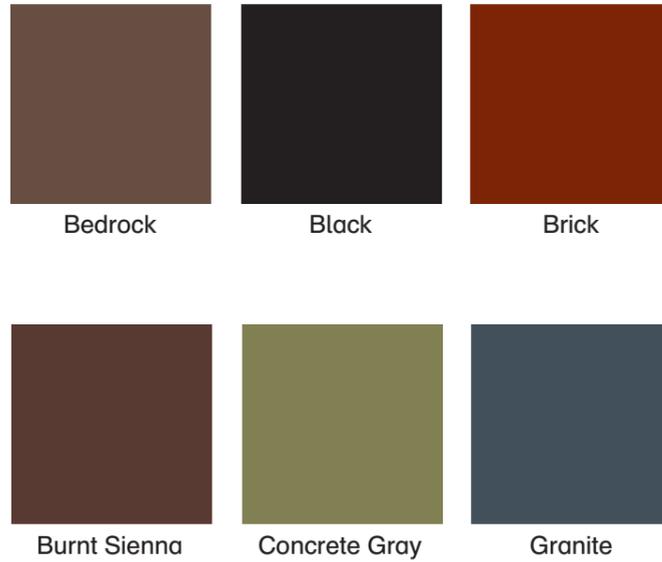



Accent Colors



The color samples may not match precisely with their physical equivalents. Always refer to physical samples before making your color choices.



Designer Colors

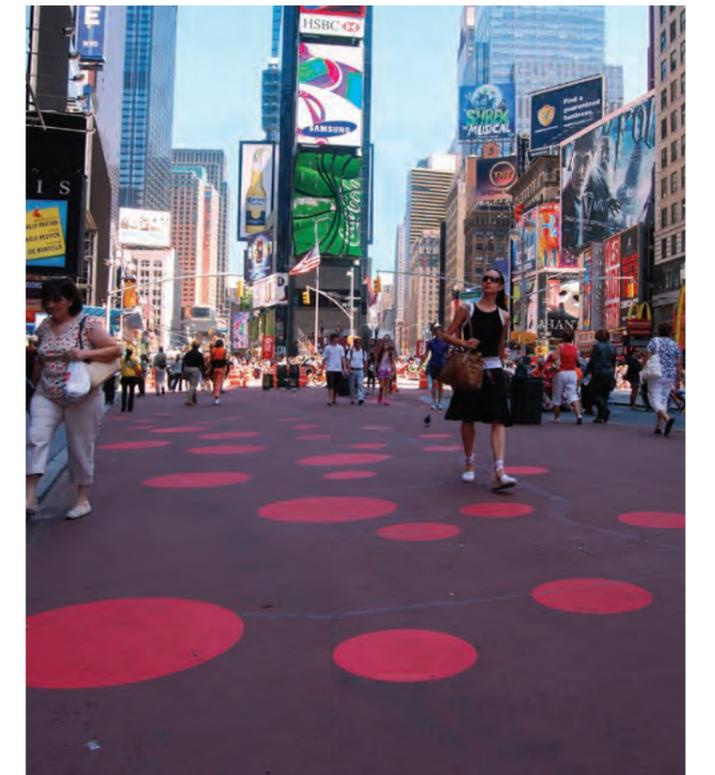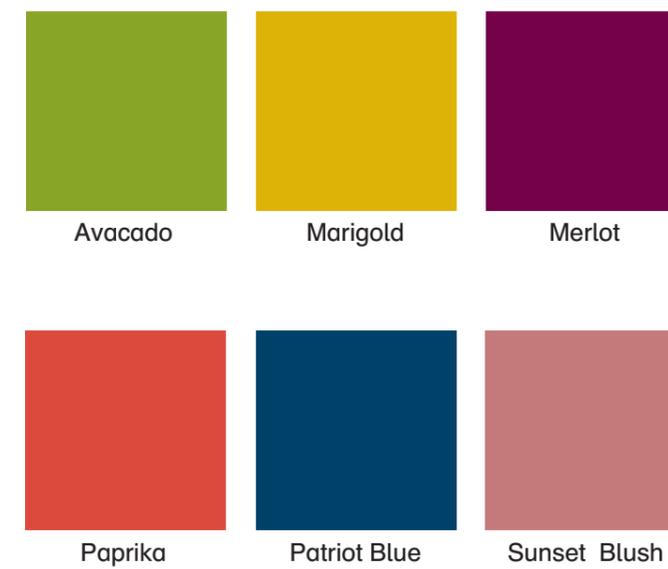





StreetBondSR™

Solar Reflective Coatings for Asphalt

StreetBondSR Colors

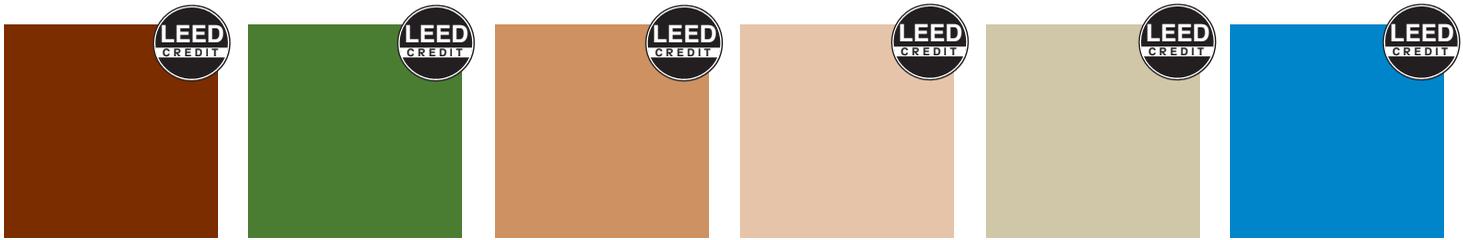

SR Brownstone (SRI = 31)	SR Evergreen (SRI = 33)	Fawn (SRI = 35)	Irish Cream (SRI = 50)	Khaki (SRI = 37)	Royal Blue (SRI = 33)
ASTM Method*: E1980 Reflectance: .30 Emittance: .90	ASTM Method*: E1980 Reflectance: .32 Emittance: .88	ASTM Method*: E1980 Reflectance: .31 Emittance: .93	ASTM Method*: E1980 Reflectance: .43 Emittance: .94	ASTM Method*: E1980 Reflectance: .33 Emittance: .94	ASTM Method*: E1980 Reflectance: .3 Emittance: .93

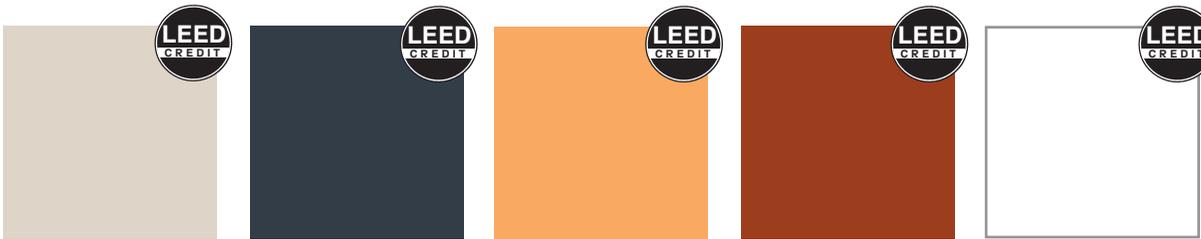


Sandstone (SRI = 36)	SR Slate (SRI = 34)	Sun Baked Clay (SRI = 52)	SR Terracotta (SRI = 33)	White (SRI = 73)
ASTM Method*: E1980 Reflectance: .32 Emittance: .94	ASTM Method*: E1980 Reflectance: .31 Emittance: .91	ASTM Method*: E1980 Reflectance: .44 Emittance: .95	ASTM Method*: E1980 Reflectance: .31 Emittance: .92	ASTM Method*: E1980 Reflectance: .60 Emittance: .94

*Reflectance values are measured in accordance with American Standard of Testing Methodology (ASTM) C 1549. Emittance values are measured in accordance with ASTM C 1371. The SRI values of StreetBond are calculated according to ASTM E 1980-01.

StreetBondCL Colors

StreetBondCL™

Colored Cycle Lanes

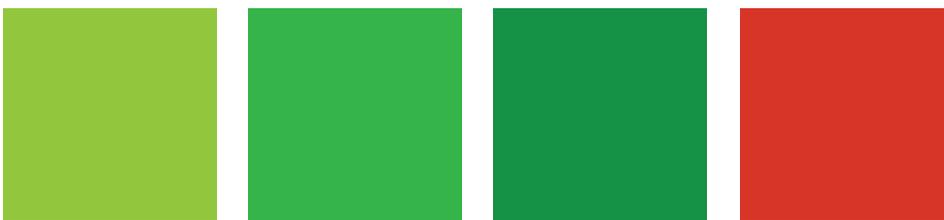

Shamrock Green Celtic Green Emerald Green Ruby Red



Other color options available.

The color samples may not match precisely with their physical equivalents. Always refer to physical samples before making your color choices.