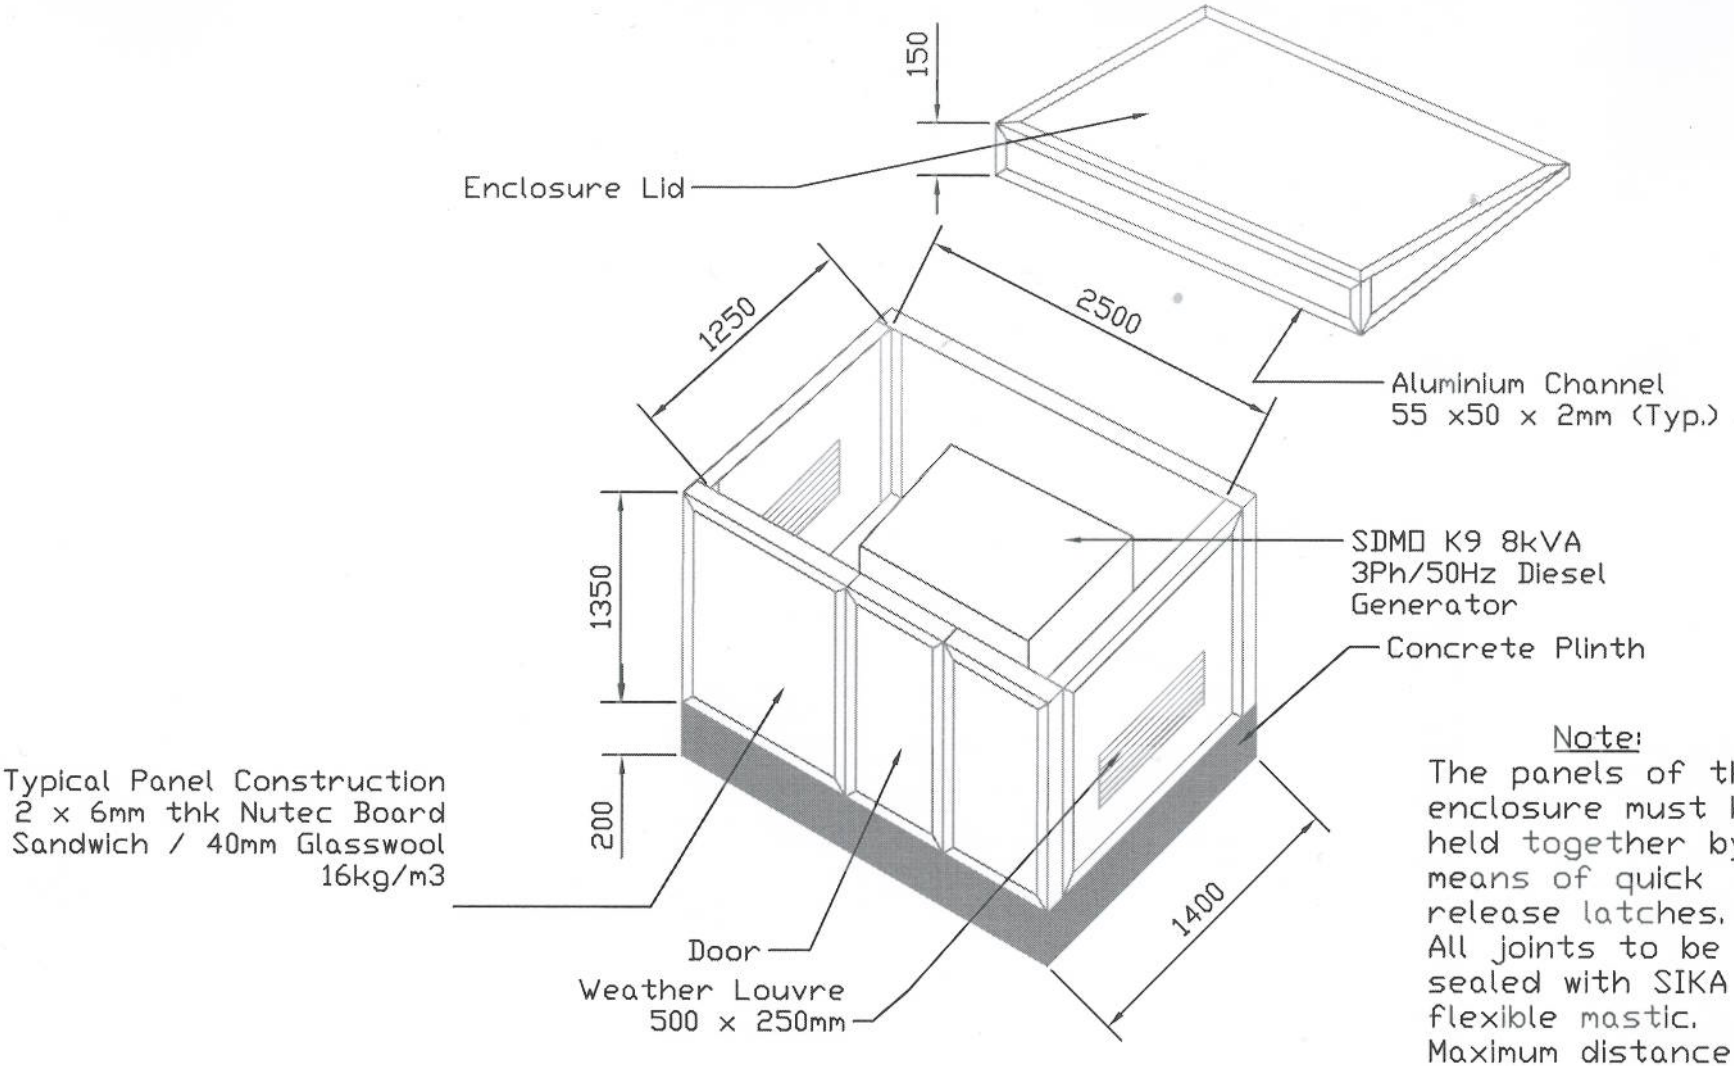

GENERATOR SOUND ATTENUATED ENCLOSURE.

Note:
The panels of the enclosure must be held together by means of quick release latches.
All joints to be sealed with SIKA flexible mastic.
Maximum distance between vertical supports is 570mm and horizontal supports 500mm.
The Nutec boards are to be attached to the aluminium structure using countersunk screws, with the distance between centres not exceeding 300mm.