SCOPE OF WORK / DRAWINGS / SPECIFICATIONS

General Information:

This document describes work to provide a sand play area and construct a full service playground, with already purchased playground equipment, for the US Embassy Libreville. The play area will be at the Sabliere Residential Housing Compound.

The contractor, in establishing his or her proposed price for completion of this work, must declare that he or she is familiar with the work locations, the constraints of each location, and the various work requirements. All information contained in this Statement of Work (SOW) is an estimate and it is the responsibility of the contractor to verify the full scope of work that will be performed in order to meet the objectives of this SOW.

Any bid submitted must be *firm and final* and must not give rise to any supplemental work or revision of the price.

The contractor must agree to respect the bid that he or she submits, including completion timeframe that will be established in the final contract.

In the event that a major disaster interrupts the work, the contractor must notify the Embassy immediately and in writing. It will be up to the Embassy to determine the validity of the notification.

The contractor is responsible for any incidental damage to Embassy property including grass, soil, walls, fences, curbs roads, plants, tress, etc... while the work is being carried out. Also, the Contractor will be responsible for damage to vehicles belonging to Embassy employees.

The contractor is also entirely responsible for the health and safety of its personnel and for any accident that may arise from the non-respect of normal health and safety protection measures.

Project Overview & Notes:

This project is to provide a sand play area for the US Embassy Libreville and assemble new playground equipment, already on site as furnished by the Embassy. The play area will be at the Sabliere Residential Housing Compound.

The contractor shall plan his work to minimize disruption to the families living at the Sabliere Residential Housing Compound. At no time can the Housing parking lots be blocked. The contractor may use the grassy area at the each site for work or storage area so long as the area is clean at the end of each day and the contractor assures continuous safe access to the guard house and rear gate within the green border area.

The Contractor shall provide all materials, tools and personnel to execute the work.

The Contractor must abide by US Embassy security regulations related to the work including providing names of staff and vehicles one week prior to work is to be performed.

Debris from the worksites must be contained within the designated work area and must be removed from the site as frequently as required to maintain a safe and presentable environment. Contractor shall dispose of the debris in a way that is acceptable by local authorities. Contractor shall not dump any debris within the Embassy compound nor shall it be dumped on the beach or neighboring property.

The work site will be inspected regularly by Embassy staff to ensure cleanliness and safety.


Scope of Work:

Sabliere Housing Compound:

- 1. Build a temporary wood fence around the work area. The wood fence must be at least 1.5 meters tall and not climbable by children. The fence is to be removed from the site at the completion of the work.
- 2. Remove the existing pavers and playground from the Compound including all concrete post foundations. Playground and concrete must be removed from the site the same day.
- 3. The size of the new play area for Sabliere is: 14.3m x 11.6m with equipment measuring 11m x 8m.
- 4. Dig out 30 cm of dirt from two areas and remove the dirt from the site.
- 5. Assemble and install the new playground equipment per the drawings furnished by the Embassy.
- 6. Completely cover the ground and sides with geofabric (not plastic) to prevent mud and silt from rising through the sand. Sample to be provided.
- 7. The contractor must install bricks between the sand and dirt to prevent the sand from washing away.
- 8. The contractor is to avoid the underground pipes during their work. If the contractor damages any system, the contractor will repair at their own expense.
- 9. Grade the area to maintain a 2% slope towards the middle of the play area.
- 10. Install 30 cm of clean, fine sand. Sand must be free of all debris including sticks, leaves, trash, animal waste, etc...
- 11. Replace all plants along the perimeter wall in the play area with new plants of similar size and type. This area is indicated as the green border in the site drawing.
- 12. The contractor is to replace any grass, walkways, doors, walls, plants, etc... damaged during the course of this work.

Sabliere Playground Area



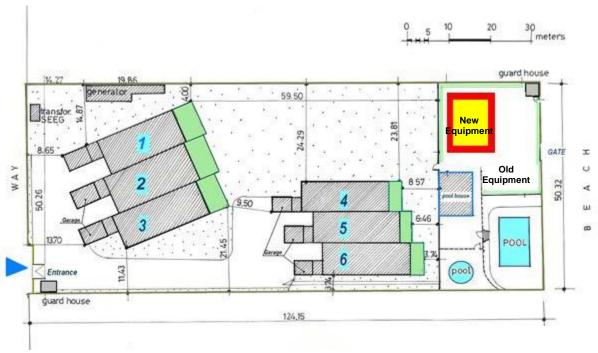

Playground Equipment to be Erected

Katherine

Product Name ▼ Product Name or Number

Search



Item Information

Item Number: 911-129B

Total Events: 13

Elevated Events: 13

Size: 35' x 26'

Use Zone: 47' x 38'


Weight: 4807 lbs.

Age Range: 5 - 12

Material Specifications (pdf) 5"OD. Also available in 3.5"OD,

reference product number 911-

229B.

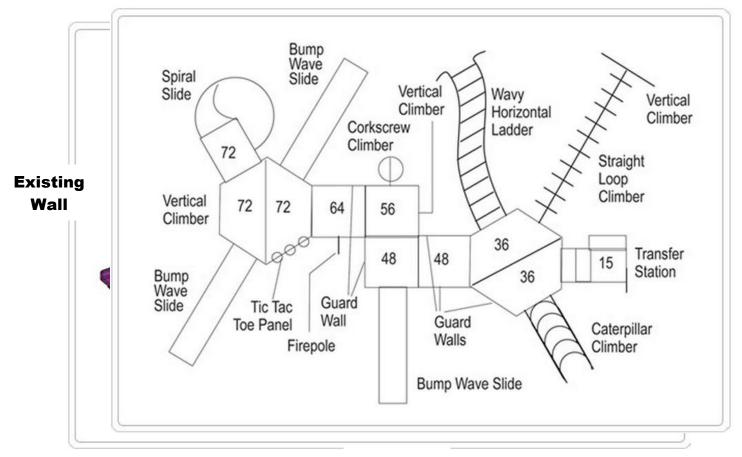

Existing Wall

##END OF SOW##