

2. AMENDMENT/MODIFICATION NO. A001	3. EFFECTIVE DATE 12/23/2013	4. REQUISITION/PURCHASE REQ. NO. PR2967106-A001	5. PROJECT NO. (If applicable)
---------------------------------------	---------------------------------	--	--------------------------------

6. ISSUED BY AMERICAN EMBASSY TEGUCIGALPA GSO, ACQUISITIONS UNIT, ATTN: GSO TEGUCIGALPA, HONDURAS	CODE HO800	7. ADMINISTERED BY (If other than Item 6) AMERICAN EMBASSY TEGUCIGALPA GSO, ACQUISITIONS UNIT, ATTN: GSO TEGUCIGALPA, HONDURAS	CODE
---	---------------	--	------

8. NAME AND ADDRESS OF CONTRACTOR (NO., street,city,county,State,and ZIP Code) NOVENDOR	X	9a. AMENDMENT OF SOLICITATION NO. SHO80014Q0001
		9b. DATED (SEE ITEM 11)
		10a. MODIFICATION OF CONTRACT/ORDER NO.
		10b. DATED (SEE ITEM 13)

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

X The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers x is extended, _ is not extended **on or before 10:00 am on January 10, 2014**

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing items 8 and 15, and returning **one** copies of the amendment;(b) By acknowledging receipt of this amendment on each copy of the offer submitted; or(c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers.

FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA (If required)

13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.

-	A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.
-	B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b)
-	C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:
-	D. OTHER (Specify type of modification and authority)

E. **IMPORTANT:** Contractor _ is not, _ is required to sign this document and return _ copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.)
The purpose of this amendment is to post the questions and answers, reflect some changes as detailed on the following pages and extend the submission of offers time and date 10:00 from December 30, 2013 to 10:00 am January 10, 2014.



Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER (Type or print)	16A. NAME OF CONTRACTING OFFICER <i>H WEISS</i>		
15B. NAME OF CONTRACTOR/OFFEROR BY _____ (Signature of person authorized to sign)	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA, BY <i>[Signature]</i> (Signature of Contracting Officer)	16C. DATE SIGNED 12/23/2013

QUESTIONS AND ANSWERS

1. Is there space available in the Embassy to store materials?
 - *Yes. The embassy will provide an exterior location for storage of materials. The contractor should consider bringing the necessary storage container with locks to store his tools. The contractor will have to build any necessary structure to protect any materials from the environment.*
2. Does the Embassy have the construction permits?
 - *The Embassy will be responsible for any paper work required with local municipality.*
3. Is communications systems required in the guard booths?
 - *No communication system will be installed in the guard booth. The contractor will only supply the electrical installations described in the scope of work.*
4. Will the Embassy provide electrical power for the contractor to do electrical work such as welding during the installation?
How?
 - *Yes. The embassy will provide the electricity for the operation of hand tools and welders. The contractor will be responsible for providing the necessary electrical extensions needed to hook up to the electric power source and will conduct the temporary installation during the progress of the project.*
5. How will electricity be provided to the guard booths? Please specify routes for electrical feed for each booth. .
 - *Below please find scope of work for the electrical portion of this project. The contractor will be required to provide all materials and labor required to complete the scope of work. Any activity carried out inside the embassy compound will require escort at all times and the contractor will be required to coordinate this activities with the COR with 48 hours notice.*
6. Will the Embassy supply the barrier and the contractor will just install the unit, or will the unit be constructed by the contractor?
 - *The contractor will be responsible for the construction, assembly and installation of the barrier following the specifications in the scope of work provided. The contractor will custom built to the dimensions required to fit the specific areas in Calzada San Carlos.*
7. What would be the location of the guard booths in the side walk?
 - *The Guard booth on the corner of Calzada San Carlos and Calle Republica de Mexico will be located on the Embassy side of the street in the inside of Calzada San Carlos after the electric utility pole located in the corner as shown in the layout below. The Guard booth on the corner of Calzada San Carlos and Avenida La Paz will be located on the Embassy corner directly where the garden structure ends..*

Avenida la Paz

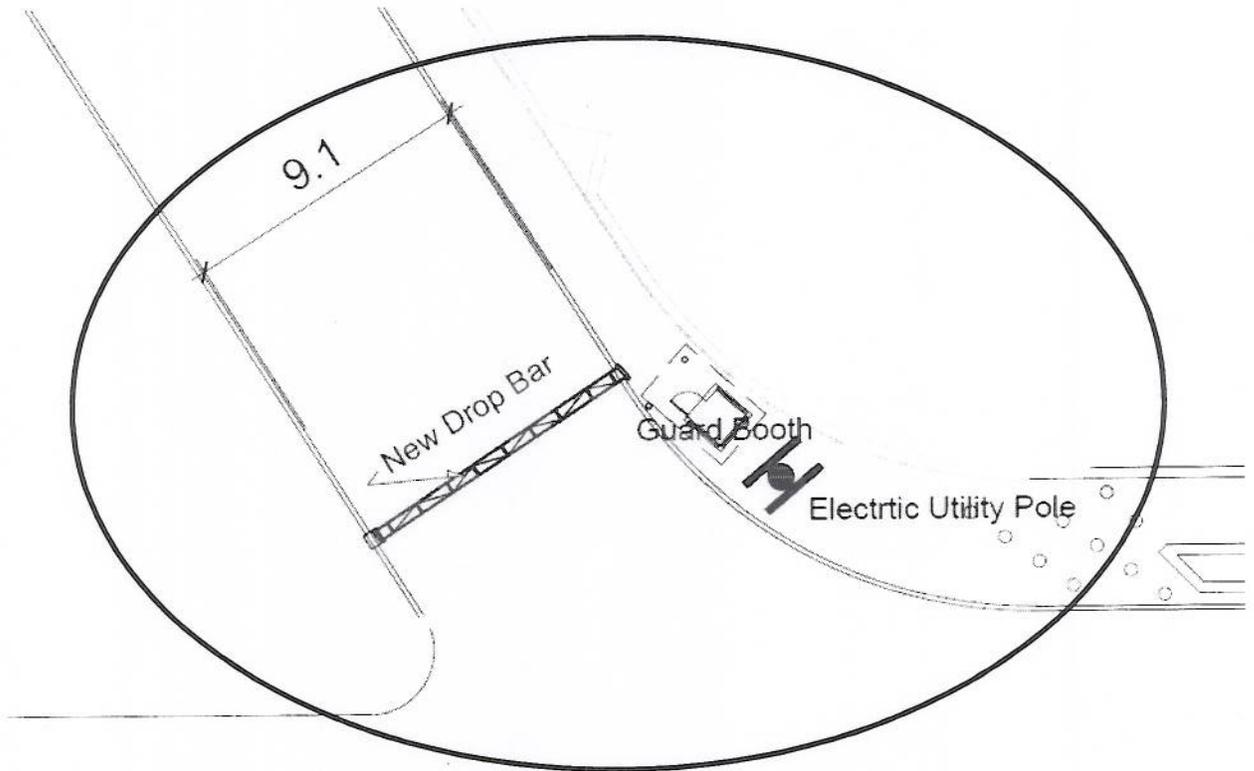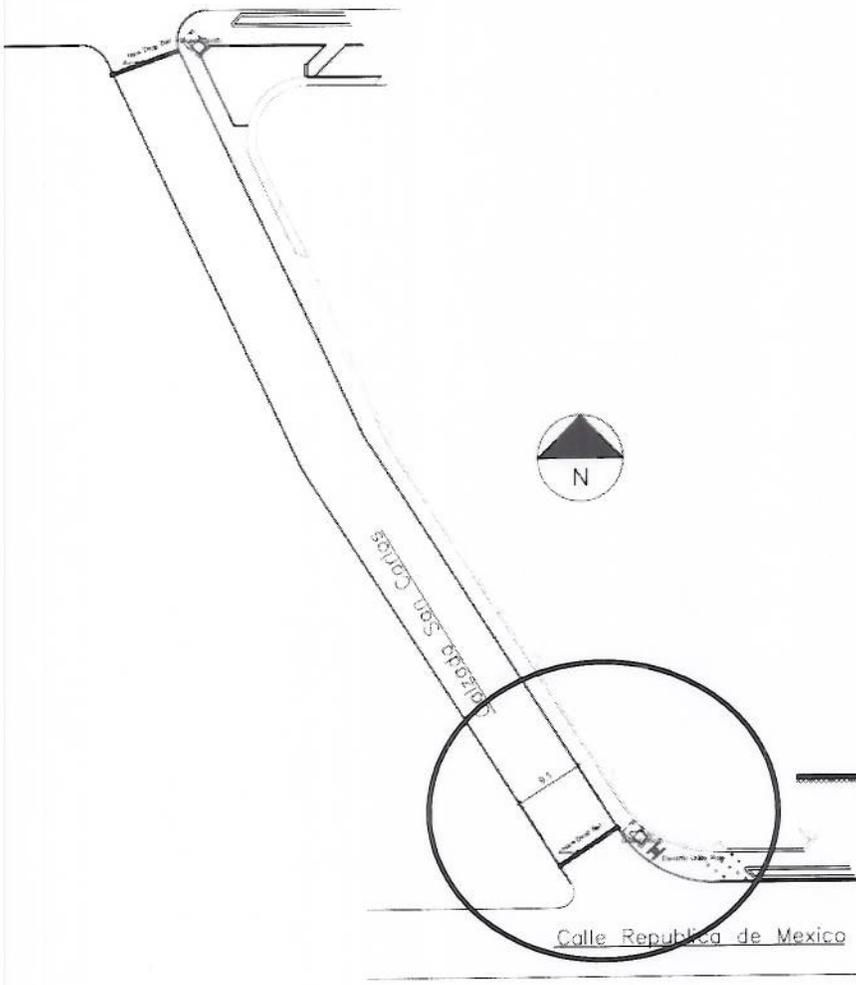

**ELECTRICAL INSTALLATIONS
REQUIRED FOR GUARD BOOTHS IN CALZADA SAN CARLOS**

SCOPE OF WORK

GENERAL

The electrical portion of this project includes:

- a) Installation of 1 light fixture inside each guard booth (capacity of 1 standard light bulb) and 1 light fixture on the exterior of each guard booth (water proof exterior fixture with cover and a capacity for 2 standard light bulbs), both controlled by a double light switch installed inside of the guard booth. Similar to photo E-1 and E-2.
- b) Installation of 1 double grounded 20 amp outlet on the inside of each guard booth. (Outlet box should be installed inside the wall and not superficial)
- c) Installation of power feed to each guard booth. The contractor will install all necessary components and electrical wiring required to feed power to each guard booth from a point specified within the Embassy gardens.

SPECIFICATIONS AND INSTRUCTIONS

- a) All electrical installation should follow American Standards.
- b) An exterior electrical panel will be installed by the contractor with a minimum capacity of 4 circuits (location A). The contractor will provide 1 breakers 20Amp, 1-phase for circuit running to point B and 1 breakers 30Amp, 1-phase for circuit running to point C.
- c) All wiring used in underground section A-B should be gauge No. 12 AWG THHN and should be installed in 1 inch electric PVC pipe CED-40. Circuit will consist of 3 wire (load, neutral and ground) and should follow color code. (Estimated: 22.17 mts.)
- d) All wiring used in underground section A-C should be gauge No. 10 AWG THHN and should be installed in 1 inch electric PVC pipe CED-40. Circuit will consist of 3 wire (load, neutral and ground) and should follow color code. A inspection box (4" x 4") should be install in the middle of the path of the underground pipe along the internal side of the Embassy perimeter wall. (Estimated: 89.68 mts.)
- e) From point B and C to each corresponding guard booth the circuit will be run through the wall and then run vertically down inside the wall and follow inside the side walk to the guard booth. At no point in the electric run will the pipe be exposed.

**LAYOUT FOR ELECTRICAL RUNS TO
THE GUARD BOOTHS IN CALZADA
SAN CARLOS**

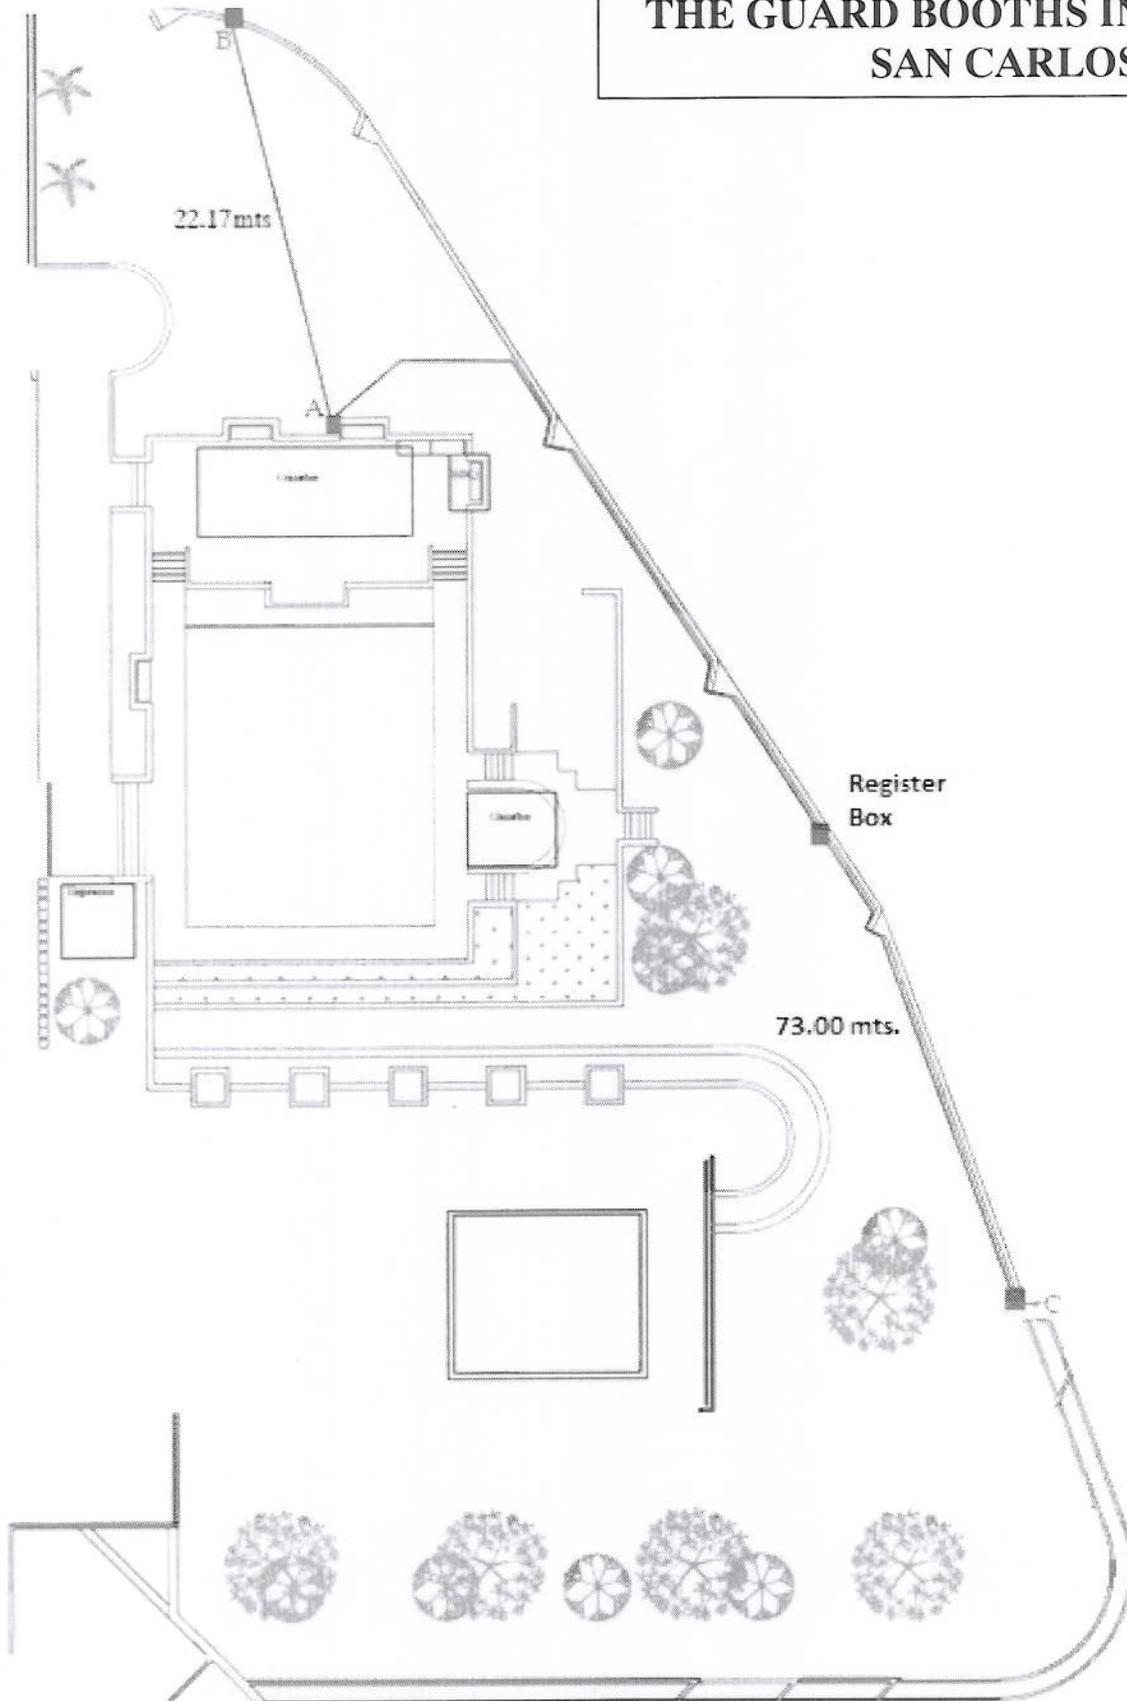


PHOTO E-1



PHOTO E-2

