

<b>AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT</b>		1. CONTRACT ID CODE	PAGE OF PAGES	
			1	8

2. AMENDMENT/MODIFICATION NO. <b>A-002</b>	3. EFFECTIVE DATE <b>8/8/2016</b>	4. REQUISITION/PURCHASE REQ. NO. <b>PR 5480367</b>	5. PROJECT NO. (If applicable)
---	--------------------------------------	---	--------------------------------

6. ISSUED BY <b>Contracting &amp; Procurement General Services Office, American Embassy Manila Seafront Compound, Roxas Boulevard, Pasay City</b>	CODE	7. ADMINISTERED BY (If other than Item 6)	CODE
--	------	---	------

8. NAME AND ADDRESS OF CONTRACTOR (No., street, county, State, and ZIP Code)	(√)	9A. AMENDMENT OF SOLICITATION NO. <b>SRP380-16-Q-0129</b>
	<b>X</b>	9B. DATED (SEE ITEM 11) <b>07/20/2016</b>
		10A. MODIFICATION OF CONTRACT/ORDER NO.
		10B. DATED (SEE ITEM 13)
FACILITY CODE		

**11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS**

The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers  --is extended,  is not extended.

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods:

(a) By completing Items 8 and 15, and returning \_\_\_\_\_ copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter of telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGEMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

**12. ACCOUNTING AND APPROPRIATION DATA (If required)**

**13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.**

(√)	A.	THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.
	B.	THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b)
	C.	THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:
	D.	OTHER (Specify type of modification and authority)

E. IMPORTANT: Contractor  is not,  is required to sign this document and return \_\_\_ copy to the issuing office.

**14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.)**

SRP380-16-Q-0129 is hereby amended to reflect the following changes:

1. Include Drawings as Attachment 5 of the solicitation.
2. Issue questions with corresponding answers.
3. Line item # 23 in the attached Scope of Work is revised to read as:  
*The contractor shall provide employees with and require the use of safety equipment, personal protective equipment and device necessary for protection. Prior to start of the work the contractor must submit a safety plan and shall be reviewed and approved by POSHO.*
4. The submission date of offers is hereby extended:  
*From: August 9, 2016, 2 p.m.  
To: August 11, 2016, 2 p.m.*
5. The revised pages of the solicitation are included as part of this amendment.
6. All other terms and conditions remain unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER (Type of print)	16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or Print) <b>JOHN A. KLIMOWSKI</b>		
15B. CONTRACT/OFFEROR  (Signature of person authorized to sign)	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA  (Signature of Contracting Officer)	16C. DATE SIGNED <b>8/8/16</b>

**Description of Work:**      **Roof Repair of Chancery ESC/RIMC/Transformer Building  
(Property #1044)**

**Location:**                      **US Embassy, Chancery Compound, Manila**

Contractor to furnish all personnel required with a knowledgeable on-the-job supervisor, transportation, tools and equipment to perform and satisfactorily complete the dismantling and installation of new Roofing System of Chancery ESC/RIMC/Transformer Building located in the American Embassy Chancery Compound, Manila. This project shall be done in strict compliance with the technical provision as stated herein after.

**SCOPE OF WORKS:**

1. Contractor to verify the extent of removal and installation works.
2. All existing rib-type metal roofing panels, rusted and deteriorated steel purlins, roof vents, downspouts and flashings shall be remove. The stainless gutters and frames shall be retained. ***The existing steel purlins and steel beam are welded.***
3. The old turbine ventilators materials shall be removed carefully to avoid damaging to other existing structures that will be retained brought down and stored at designated disposal area. Salvage and old materials removed shall belong to the contractor and removed remove from the job-site by the contractor
4. Fabrication of stainless flashings shall be formed at contractor's shop.
5. Care must be taken during removal work to prevent damage, accident or harm to persons, structures, vegetation, facilities and surfaces.
6. The steel purlins and newly installed gutter hangers shall be thoroughly cleaned free from dirt using scrapers and wire brushing prior to painting.
7. Roof panels shall be Philsteel trim deck long span roof panels or COR approved equivalent. Gauge 22 or 0.80 mm thick with factory hot dipped zinc coating at nominal coating of 305 gm/m<sup>2</sup>, oven-baked paint finish of epoxy primer and polyester paint, total dry paint. Roof panels shall be crest-fastened to the existing steel purlins, using Wafer Tek screw #12-24 x45mm hex head with neoprene washers at 6" on centers. For attachment edge flashings to the roof panels, use same size of Wafer Tek screws #10 x 45mm hexhead neoprene washers.
8. New stainless flashings shall be gauge 22 or 0.80 mm thick. All new PVC downspouts shall be provided with stainless basket strainer.
9. New steel purlins shall be same steel property with the existing ***with 2" x 4" size.***
10. New downspout pipes shall be 4" diameter PVC pipe with a thickness of 4.6mm or schedule 40. Pipe shall be properly installed, sealed around joints and connected to the new roof gutter at position of existing downspouts. New PVC downspouts shall be applied with two (2) coats of quick dry enamel.
11. New stainless basket strainers shall be properly installed and connected to the downspouts inlets.

NOON

NOON

12. Flash and seal turbine ventilators at roof panel and rake with rubber neoprene, or other closures to exclude weather.
13. The contractor shall furnish all materials required, tools and special equipment to perform the dismantling and installation of new roofing system.
14. The roof must be closed at the finish of each day. Provide tarpaulin cover on the termination of old and new roof panels and ridge roll. No exception.
15. Contractor shall erect steel scaffolds on the back side of the ESC/RIMC building for access to and from the roof. Strictly use steel scaffolds. All areas that will be affected by removal and installation works shall be well covered and protected
16. Electric power and water required for this project shall be supplied by U.S. Embassy. The Contractor is responsible for all connections and extensions from source to the work area.
17. The COR shall designate an area for the contractor's temporary field office and storage space which shall be kept clean, orderly and secure at all times. Contractor's personnel are prohibited from staying on the premises after each day's work.
18. Working hours shall be from 0730 hours to 1615 hours, from Monday thru Friday, unless otherwise requested and approved by COR.
19. The Contractor shall submit to the COR for approval of Security Office a complete list and bio-data of personnel who will work in the project with three (3) each recent 1" x 1" black and white ID pictures recent police and/or NBI clearances prior to issuance of embassy ID cards. The contractor shall continuously, during the progress of the work, remove and dispose dirt and debris and keep work area clean, neat and orderly and in such order as to prevent safety hazards. Debris shall be collected and removed from the job-site daily
20. The project safety, in all respects, is the sole responsibility of the Contractor.
21. Smoking is strictly prohibited at the work site. A smoking area will be assigned.
22. Contractor's personnel are to use only proper toilet facilities. No urinating on walls, grass and other areas.
23. The contractor shall provide employees with and require the use of safety equipment, personal protective equipment and device necessary for protection. ***Prior to start of the work the contractor must submit a safety plan and shall be reviewed and approved by POSHO.***
24. The Contractor is responsible for all injuries to his workers. The U.S. Embassy medical unit is not to be used by the Contractor's personnel.
25. The contractor guarantees to complete the work within forty (40) working days from the date of Notice to proceed.
26. The Contractor shall guarantee all materials workmanship for one year determined from the date of final acceptance.

**Q&A – SRP-380-16-Q-0129**

**ROOF REPAIR OF CHANCERY ESC/RIMC/TRANSFORMER BUILDING**

Q: What is the connection of Cee Purlins to I-beams? Is it welded?

A: Please refer to Scope of Work item # 2, marked as A-002.

Q: Are we required to submit Building Permit and Barangay Permit?

A: Building and Barangay permits are not required.

Q: What is the size of the existing Cee Purlins?

A: Please refer to Scope of Work item # 9, marked as A-002.

Q: Who will provide electrical and water utilities?

A: Please refer to Scope of Work item #16, marked as A-002.

Q: Completion time is 40 working days but we will be doing phase by phase replacement of the roofs and this will consume more time. Is it possible to make it 60 working days?

A: Please refer to Scope of Work item # 25.

Q: May we request for architectural plan and details of the roof?

A: Please refer to Attachment 5 marked A-002.

## TABLE OF CONTENTS

SF-18

- A. PRICE
- B. SCOPE OF WORK
- C. PACKAGING AND MARKING
- D. INSPECTION AND ACCEPTANCE
- E. DELIVERIES OR PERFORMANCE
- F. ADMINISTRATIVE DATA
- G. SPECIAL REQUIREMENTS
- H. CLAUSES
- I. LIST OF ATTACHMENTS
- J. QUOTATION INFORMATION
- K. EVALUATION CRITERIA
- L. REPRESENTATIONS, CERTIFICATIONS, AND OTHER STATEMENTS OF OFFERORS OR QUOTERS


### ATTACHMENTS:

- Attachment 1: Scope of Work
- Attachment 2: Breakdown of Price by Divisions of Specifications
- Attachment 3: RSO Biographic Data
- Attachment 4: Holiday Schedule
- Attachment 5: Drawings*

**A  
0  
2**

ATTACHMENT #5  
DRAWINGS  
(2 pages)

A  
0  
0  
2

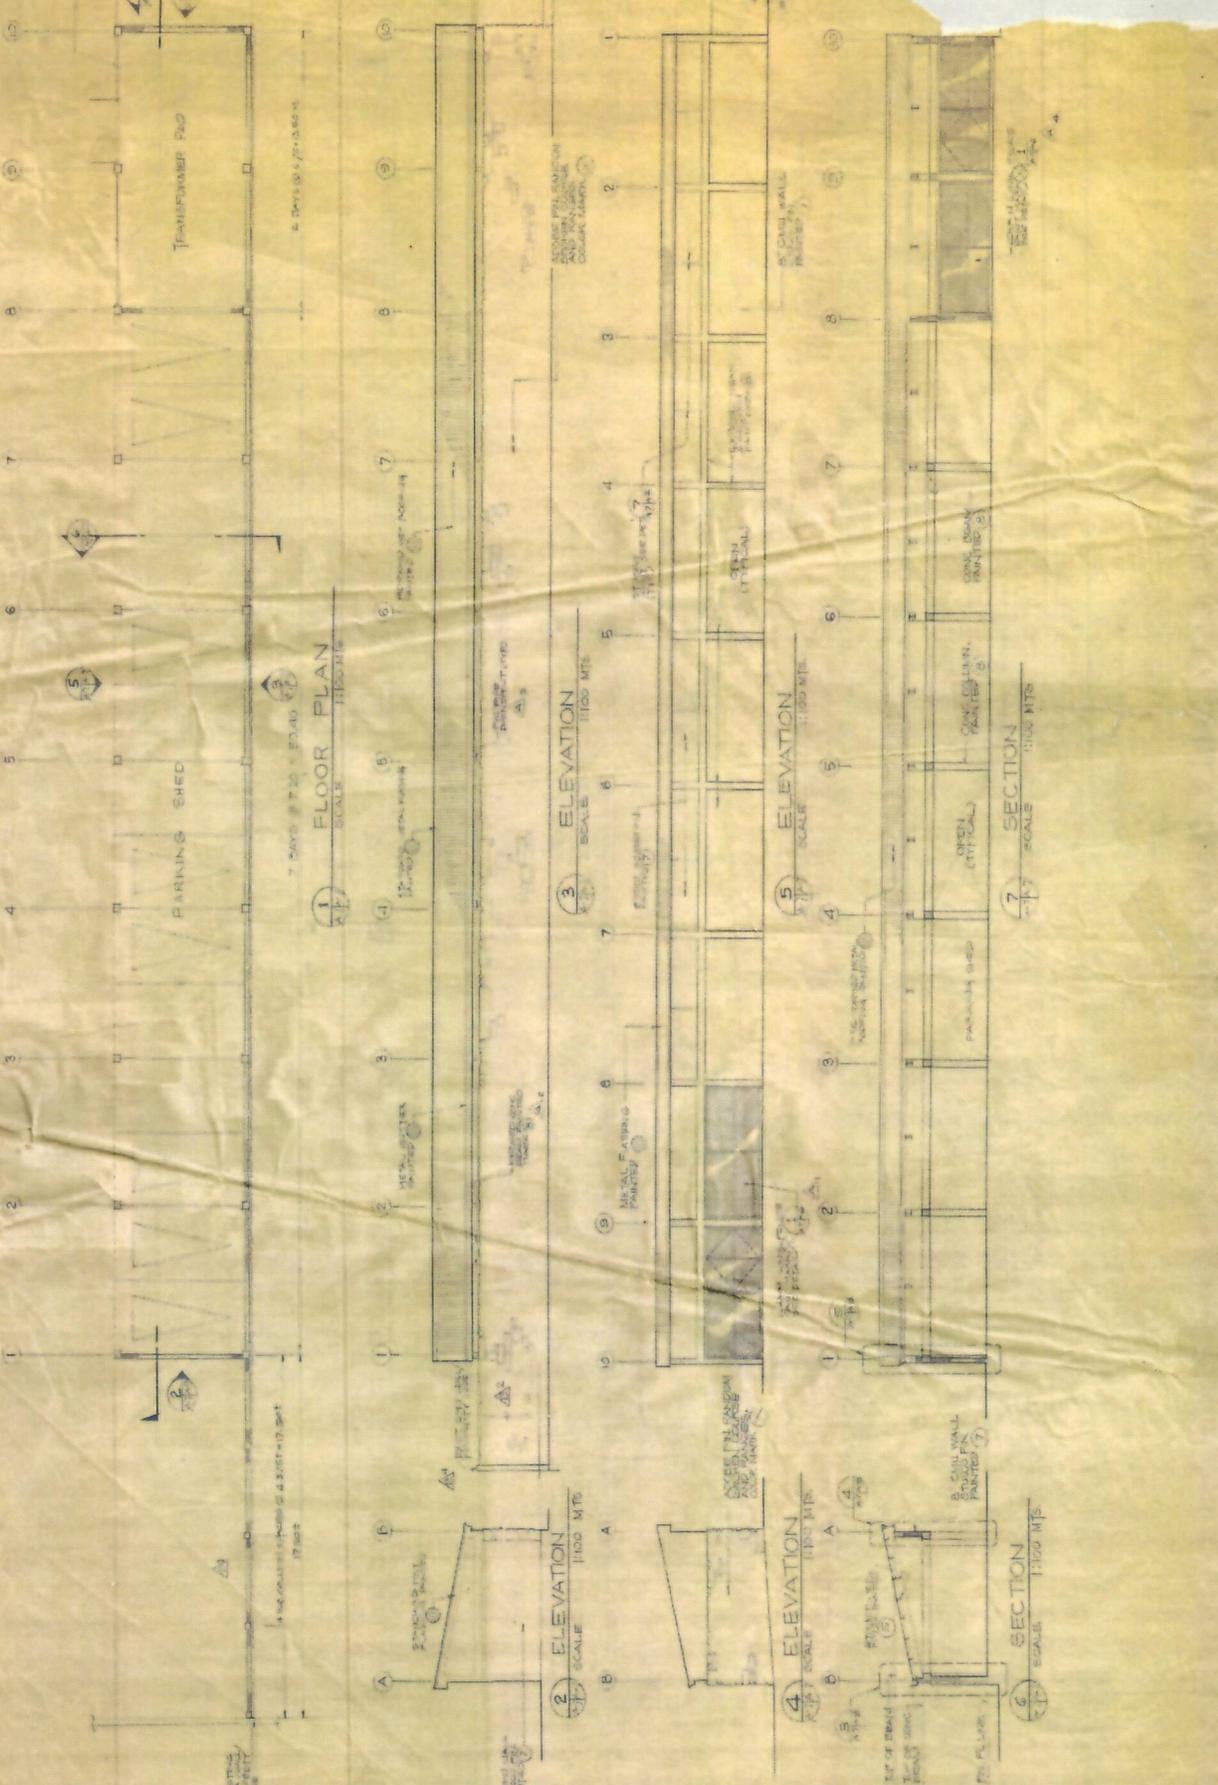

<b>TRASEN ASSOCIATES, LTD.</b> ARCHITECTS METRO MANILA	SEE NAME OR NAME OF FIRM	SHEET CONTENT FLOOR PLAN, ELEVATIONS AND SECTIONS	PROJECT TITLE <b>AIR CONDITIONING AND ELECTRICAL UTILITY PLANT</b>	REVISION	DATE	OWNER UNITED STATES EM MANILA REPUBLIC OF THE
	17-002 4.52 (0.011) (0.002) 4.2 (0.1) (0.2) 17-002	17-002	17-002	17-002	17-002	17-002

P  
AR  
02  
SHEET

